


Uputstvo za podešavanje ZyXEL P-600 rutera



KORAK 1: FIZIČKO POVEZIVANJE ZyXEL P-600 rutera

Telefonski kabl povežite iz **ADSL** porta na ruteru u telefonsku utičnicu. Računar priključite na **LAN** port na ruteru. Uključite adapter u struju i startujte ruter pritiskom na prekidač koji se nalazi sa zadnje strane rutera.

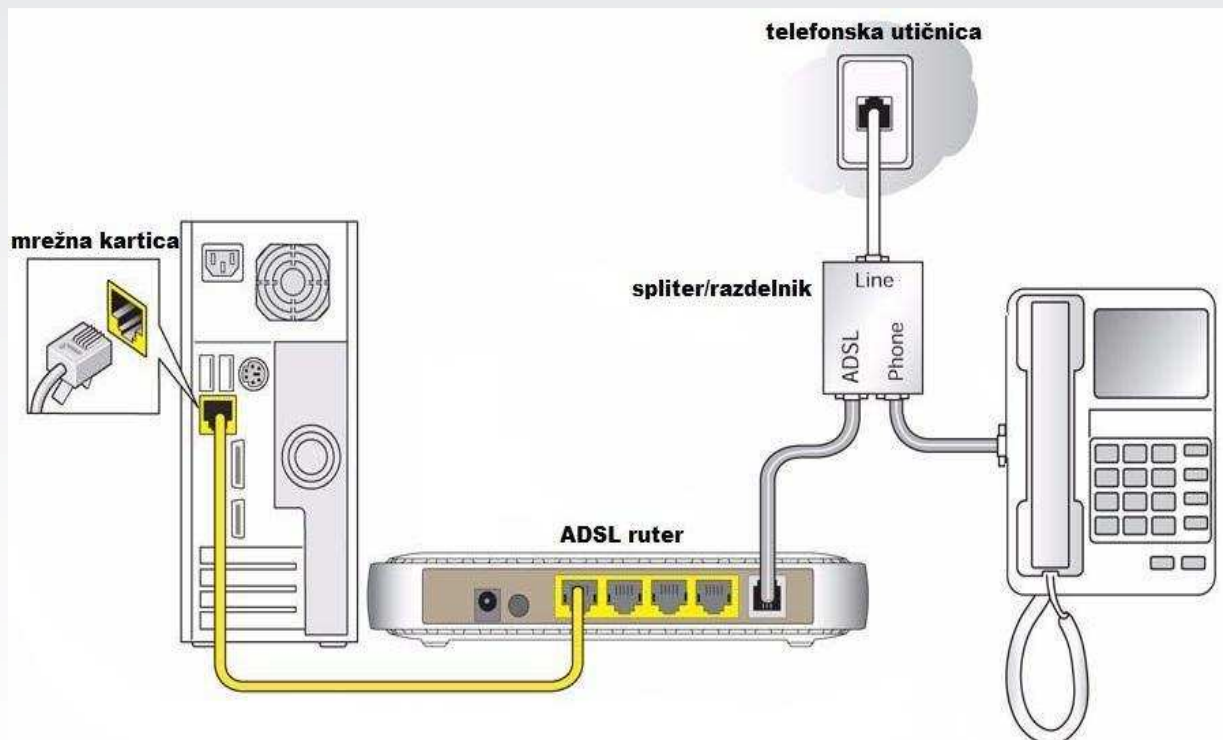

Uputstvo za podešavanje ZyXel P-600 rutera

KORAK 2: KONFIGURISANJE RUTERA

Pokrenite internet pretraživač (Internet Explorer, Mozilla, Opera, Safari...), a zatim u polje za unos web adrese unesite: **192.168.1.1**

Pritisnite **Enter** taster na tastaturi.


Nakon ovog postupka, pojaviće Vam se login prozor u koji je potrebno upisati sledeće parametre:

username: **admin**

password: **1234**



Kada ste upisali username i password nastavite podešavanje pritiskom na taster **Submit**, nakon čega pristupate podešavanjima rutera.

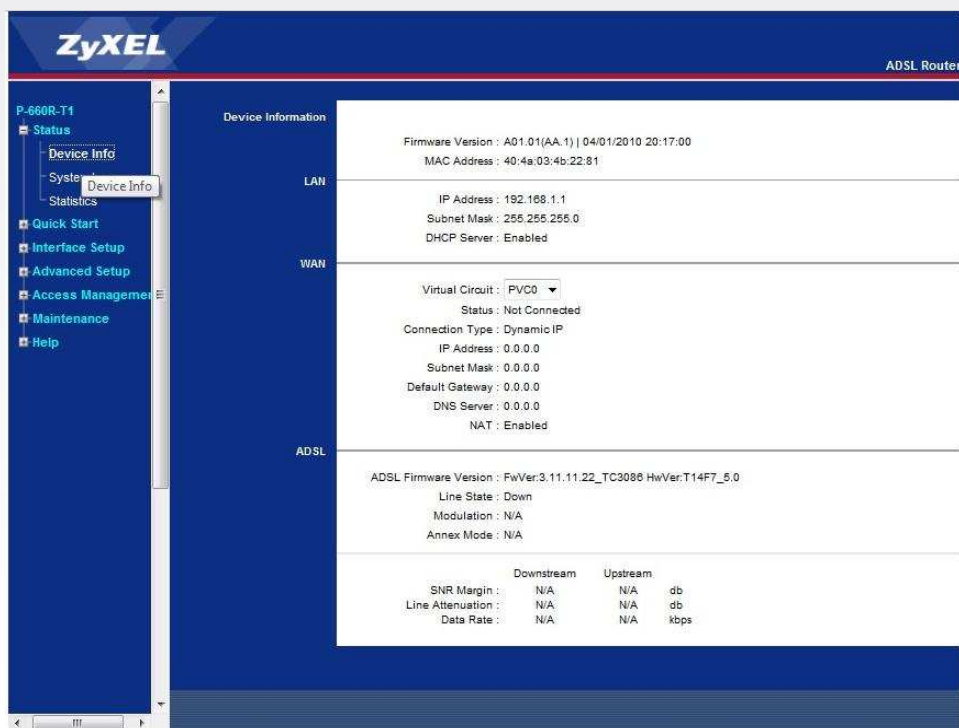

	Downstream	Upstream	
SNR Margin :	N/A	N/A	db
Line Attenuation :	N/A	N/A	db
Data Rate :	N/A	N/A	kbps

Uputstvo za podešavanje ZyXel P-600 rutera

U delu **Interface Setup** pod stavkom **Internet** neophodno je podesiti podatke za konekciju rutera. Unesite sledeće parametre:

- ✓ Virtual Circuit : **PVC0**
- ✓ VPI: **8** ; VCI: **35**
- ✓ Connection Type: **PPPoE**
- ✓ Service name: **Orion Telekom**
- ✓ Username: Korisničko ime koje ste dobili prilikom sklapanja ugovora u obliku **korisnicko_ime@sezampro**
- ✓ Password: Lozinka koju ste takođe dobili prilikom sklapanja ugovora
- ✓ Encapsulation: **PPPoE LLC**
- ✓ Default route: **YES**

Sva ostala podešavanja možete ostaviti kao što jesu, a potom kliknite na dugme **SAVE**.

The screenshot displays the ZyXEL ADSL Router configuration interface. The left sidebar shows the navigation menu with 'Interface Setup' > 'Internet' selected. The main content area is titled 'ATM VC' and contains several sections:

- Virtual Circuit:** PVC0 (selected), with a 'PVCs Summary' button.
- Status:** Activated (selected), Deactivated.
- VPI:** 8 (range: 0-255).
- VCI:** 35 (range: 32-65535).
- QoS:** ATM QoS: LBR (selected).
- Encapsulation:** PCR: 0 cells/second, SCR: 0 cells/second, MBS: 0 cells.
- ISP:** Dynamic IP Address, Static IP Address, PPPoA/PPPoE (selected), Bridge Mode.
- PPPoE/PPPoA:** Servicename: (empty), Username: korisnicko_ime@sezampro, Password: (masked), Encapsulation: PPPoE LLC (selected), Bridge Interface: Activated, Deactivated (selected).
- Connection Setting:** Connection: Always On (Recommended) (selected), Connect On-Demand (Close if idle for 0 minutes), Connect Manually, TCP MSS Option: TCP MSS(0,default) 0 bytes.
- IP Address:** Get IP Address: Static, Dynamic (selected), Static IP Address: 0.0.0.0, IP Subnet Mask: 0.0.0.0, Gateway: 0.0.0.0, NAT: Enable (selected), Default Route: Yes (selected), No, TCP MTU Option: TCP MTU(0,default) 0 bytes, Dynamic Route: RIP1, Direction Both, Multicast: Disabled (selected), MAC Spoofing: Enabled, Disabled (selected), MAC Address: 00:00:00:00:00:00.

A 'SAVE' button is located at the bottom of the configuration area.

Ukoliko budete imali ikakvih nejasnoća ili problema, molimo Vas da se obratite korisničkom servisu telefonskim putem na: **011 4100 100**.

Sve tekuće informacije možete naći i na našem sajtu : www.orientelekom.rs